





1. The truss ABC shown in the figure supports a vertical load P at joint B. Both bars have axial rigidity EA . Obtain the vertical displacement δ_b at B by Energy method. (20%).

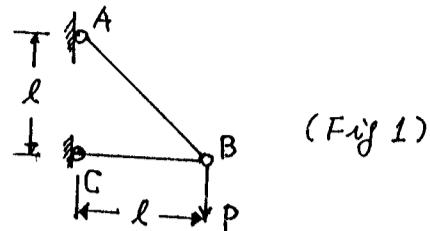

2. The truss ABC shown in the figure supports a vertical load P . Each member is a slender circular steel pipe ($E = 200 \text{ GPa}$) with outside diameter 100mm and wall thickness 6.0 mm . Determine the allowable load P_a if the factor of safety with respect to buckling of the members is $n=2$ and the distance between supports is $l = 7.0\text{ m}$. (20%)

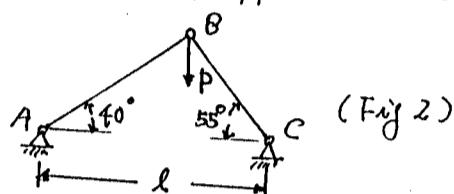


3. A beam having a cross section in the form of a channel (see figure) is subjected to a bending moment acting about the x axis. Calculate the thickness t of the channel in order that the bending stresses at the top and bottom of the beam will be in the ratio $7:3$, respectively. (20%)

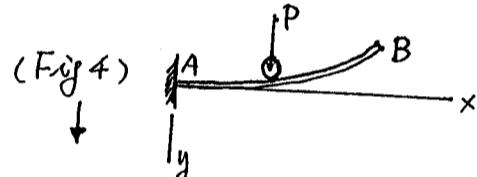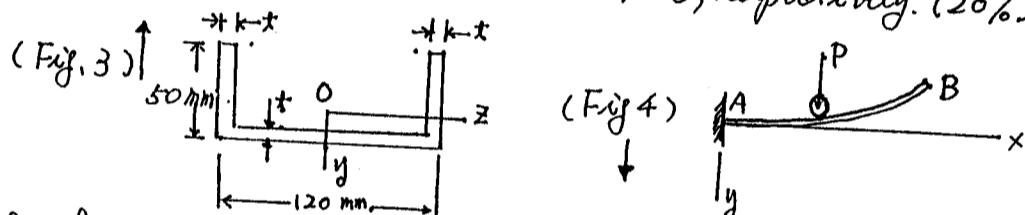

4. What must be the equation $y = f(x)$ of the axis of the curve beam AB (see figure) before the load is applied in order that the load P , moving along the bar, always stays at the same level? (20%)

5. A cylindrical pressure vessel having radius $r = 300\text{ mm}$ and wall thickness $t = 15\text{ mm}$ is subjected to internal pressure $p = 2.5 \text{ MPa}$. In addition, a torque $T = 120 \text{ kN}\cdot\text{m}$ is applied to the closed ends of the cylinder (see figure).

- (a). Determine the stresses σ_x , σ_y , τ_{xy} acting on a stress element at point A in the wall of the cylinder (10%)

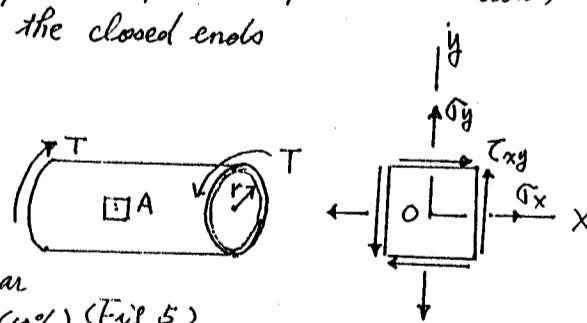

- (b). Determine the maximum tensile stress σ_{max} and the maximum in-plane shear stress τ_{max} in the wall of the cylinder (10%) (Fig 5)