

## 1. Using the Routh-Hurwitz criterion, (20%)

10% (1) determine the stability of the closed-loop system that has the characteristic equation

$$q(s) = s^6 + s^5 + 11s^4 + 5s^3 + 36s^2 + 6s + 36 = 0$$

10% (2) determine the number of roots of the above equation that are in the

- (a) left-half s-plane ,
- (b) on the  $j\omega$ -axis and
- (c) in the right-half s-plane.


## 2. A control system is shown as the following diagram, (30%)

$$G_c(s) = \frac{s+2}{s+5}, \quad G_a(s) = \frac{1}{s}, \quad G_p(s) = \frac{9}{s+2}, \quad H(s) = 1 \quad \text{Determine}$$

10% (1) the settling time  $T_s$

10% (2) the peak time  $T_p$

10% (3) the steady-state error of the step input  $e_{step}(\infty)$

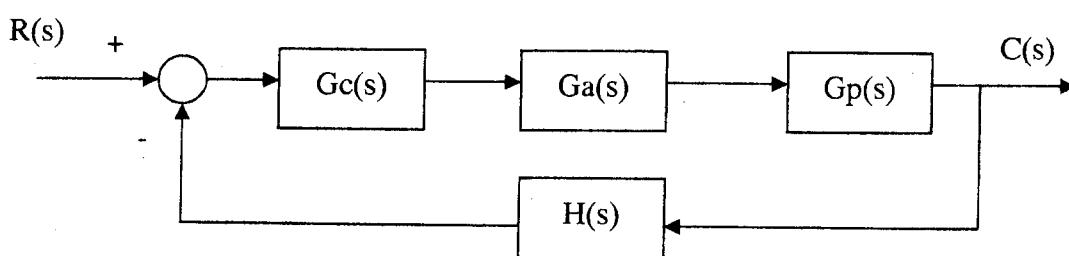

(背面仍有題目, 請繼續作答)

本試題是否可以使用計算機：  可使用  不可使用 (請命題老師勾選)

考試日期：0301，節次：2

## 3. Consider a system as the following, determine

(20%)

10% (1) if it is controllable?

10% (2) if it is observable?

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} -1 & -4 & -2 \\ 0 & 6 & -11 \\ 1 & 7 & -1 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 2 \\ 0 \\ 1 \end{bmatrix} u$$

$$y = [0 \ 0 \ 1] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

4. The Bode Plot of the unit feedback system with open-loop transfer function  $KG(s)$  is shown as the followings ( $K=1$ ), determine

(30%)

10% (1) Gain-crossover Frequency  $\omega_g$ 10% (2) if the gain margin G.M.=40dB, then  $K=?$ 10% (3) if the phase margin P.M.= 45°, then  $K=?$ 